


# Blinc BL100i instruction manual

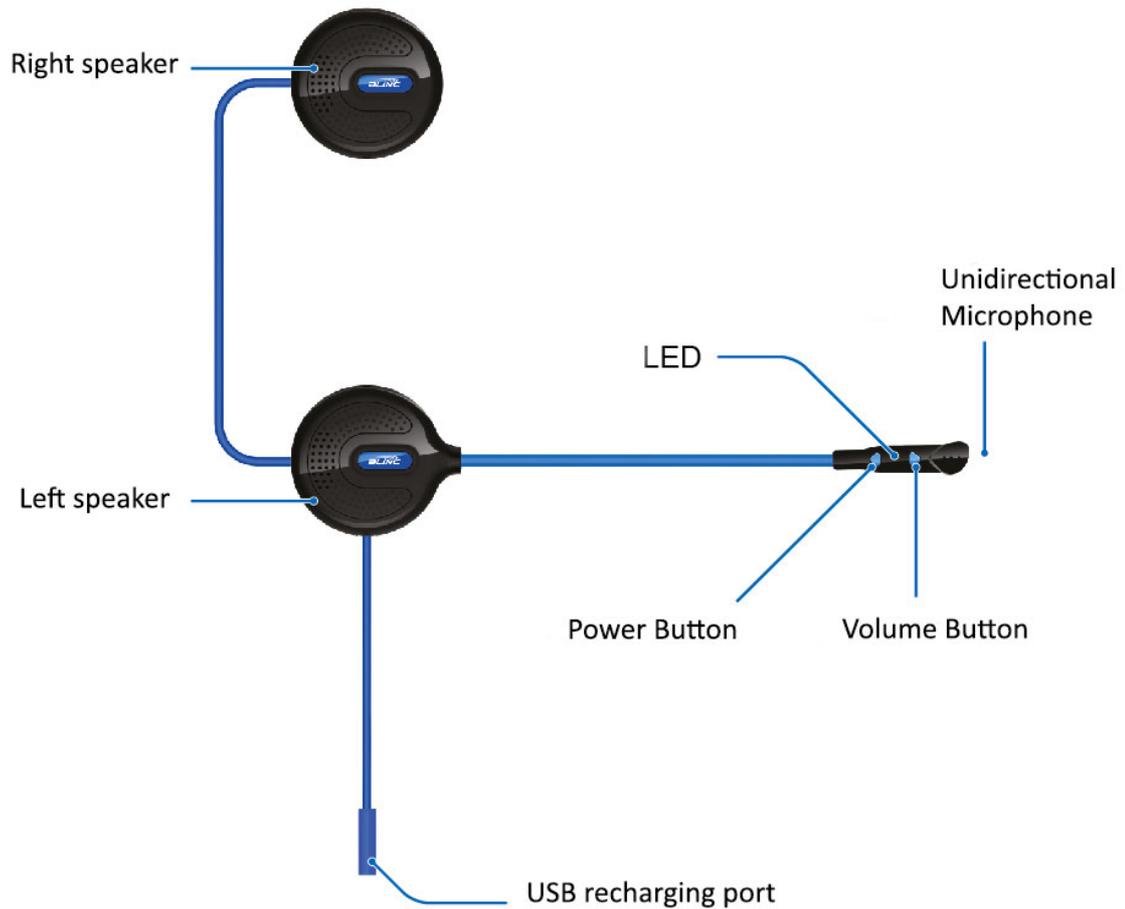

## **For your safety, please turn on Blinc device before driving**

Thank you for choosing the device Blinc Bluetooth™ BL100i!

This manual contains a brief guide of the device Blinc™ BL100i integrated and installation information and device settings. Please read carefully before using the product.

## **Package Contents**

Please check the following contents of the package:

- Integrated Bluetooth device.
- Cover microphone X4.
- USB cable for charging.

# Blinc BL100i instruction manual

## Switching on and off

### Power on

Press and hold the "Power" button for 2 seconds to turn it on. You will see a blue light flashing and you will hear a beep and the growing "power on".

### Power off

Press and hold the "Power" for at least 6 seconds.

You will see a flashing red light and you will hear "Power off".

Alternatively, press the "Power" and "Volume Control" at the same time for 0.3 seconds, the red LED will light up for a second until it shuts down completely and you will hear "Power off".

## Pairing with mobile phones

Make sure the device is turned off BL100i. Press the "Power" for at least 6 seconds until the blue and red LEDs flash alternately. The device is in pairing mode.

Activate the Bluetooth feature on the phone. Activate the device search on the phone. Then choose the "combine the phone with the device." When the pairing is completed BL 100i communicates over the speakers "Pairing succesful".

Once done the match, it will start flashing regularly only the blue LED on the device BL 100i.

Note: If prompted by the phone, enter "0000" as a PIN.

Once paired successfully, the two devices are connected in automatic switching to the next. Press the "adjusted volume" to connect the last paired phone.

## Pairing with the second Bluetooth device or mobile

Bluetooth allows multiple pairing of two Bluetooth devices at the same time.

You can combine the first and second Bluetooth device or mobile phone to BL 100i with the simple procedure in "Pairing with your mobile phone."

To change Bluetooth device, select the BL 100th in the list of Bluetooth devices.

## Stereo Bluetooth device pairing

If the Bluetooth device is integrated with a smartphone, it is not necessary to connect the BL 100i with him separately.

When the BL 100i is matched with phone, it is also coupled device OCME Stereo.

If you have a Bluetooth device "stand-alone", follow the pairing procedure separately. The procedure is the same pairing with the phone.

# Blinc BL100i instruction manual

## Intercom

The BL 100i can be combined with another set of Bluetooth headsets for intercom conversations.

1. Turn on the two headsets BL 100i (A and B) that you want to combine with each other.
2. Press and hold the button "Volume Control" earphones A and B for 2 seconds until the LED flashes red and blue alternately. You will hear a voice that says "Pairing" in the speaker.
3. Press the "Volume Control" button on device 1.
4. Press the "power" button on device 2, you will hear a voice say, "pairing successful".

NOTE: This procedure is performed only once, for subsequent use to see the procedure "To initiate a conversation Intercom"

If the pairing process is not completed within two minutes, the BL 100th will return to stand-by mode

## Start a Intercom conversation

1. Start an intercom conversation by pressing the "Power" button.
2. To end an intercom conversation, press the "Power" button one more time.

## Voice indicator for the battery capacity

When the device BL 100i is off, press the "Power" button for one second, you will hear a voice that indicates the battery level through the speakers:

- "Battery full", 70-100%
- "Battery fifty percent", 30-70%
- "Battery low", 0-30%

## Low Battery signal

When the battery level is low, the red LED light will flash every 30 seconds, and you will hear a voice say, "Battery Low" in the speakers.

## Charge your Blinc Bluetooth system

Use the cable inside the package to charge the Blinc Bluetooth system. Connect the USB cable into a USB port of a computer or a wall charger. The LED indicator shows a red light intermittently while the device is charging and a fix red light when the battery is fully charged. It takes about 2 hours to fully charge.

The integrated Bluetooth Blinc BL 100i uses a lithium polymer battery to provide the power supply. The battery provides a long life and can be recharged at any time.

Note: the number of connected devices affect battery life.

## Volume control:

Increase volume: Press and hold the "Volume Control" and hold, the volume will increase step by step, when it reaches the maximum volume will keep the volume to 2/2.

Decrease the volume: Press and briefly hold the button "Volume Control"

# Blinc BL100i instruction manual

## **Make and answer a call from the mobile phone**

Answering a call

Press the "Volume Control" to answer the call or BL 100i will respond to the call automatically after 8 seconds.

## **End a call**

To end a call press the "Volume Control" again. You will hear a voice say, "call terminated" in the speakers.

## **Rejecting a call**

To reject a call double click on the "Volume Control". You will hear a voice say, "call rejected" in the speaker.

## **Last number redial**

Press twice quickly the button "Power button" on stand-by to redial the last number. You will hear a voice say, "redialing".

## **Use voice commands Smartphone:**

Press twice quickly press "volume control"

## **Music Stereo**

And 'possible to listen to music in stereo via Bluetooth. The Bluetooth device must first be paired according to the instructions "Pairing with device BL100i stereo".

The BL100i fully supports Audio / Video Remote Control Profile (AVRCP), even if your Bluetooth audio device supports AVRCP can utilize the BL100i to manage the music remotely. So now you can access features such as play, pause, next and previous.

1. To adjust the volume, press and hold the "Volume Control", the volume will gradually increase, when it reaches the maximum volume, keep the volume to a maximum of 2 seconds and if you hold down the volume will gradually decrease to a minimum.
2. To start or stop the music, press the power button for one second.
3. To go to the next or previous song, double click on the button "Power" or on "volume adjustment".

Note: high volume can cause hearing damage.

# Blinc BL100i instruction manual

## Installing the Bluetooth system integrated into your helmet

Attach the soft side of Velcro in the ear cavity of the helmet and then merge with stiff part of Velcro (behind the speaker). Be sure to insert the wires of the speaker and microphone in the correct position inside the helmet.

When installing the Bluetooth system, make sure the microphone is pointing towards your mouth and that the speakers are oriented toward your ears. E 'can remove the cover to check the direction of the microphone.



Full-face helmet



Three quarters



half helmet

